

FRENCH DOORS 2 HOOK 2 ROLLER 2 SHOOT HIGH SECURITY LOCKING SYSTEM




MULTI-POINT LOCK

FEATURES & BENEFITS

- Designed to meet the requirements of PAS 23 and PAS 24
- Licensed by Secured by Design
- Lifetime Guarantee
- Stainless steel 16mm face bar
- Available as 35mm Backset
- Non-handed lock mechanism with reversible sash bolt to minimise stock requirements
- Snib facility as standard on all locks
- Central deadbolt throws 22mm to prevent unauthorised entry
- Accepts standard 92mm unsprung handles and euro profile cylinders (operates with BS and DIN specification cylinders)
- Split spindle for lever/pad applications - choice of length available
- Bi-directional throw of locking features - enhanced anti-jimmy feature
- Twin high security hooks for anti-separation resistance - 28mm projection
- Hooks deadlocked in the fully thrown position
- Stainless steel keeps giving 4mm adjustment
- Precision rollers for enhanced performance and weather sealing
- Profile specific keeps
- Optional shoot bolt engagement for additional security
- Single and french door (slave lock unit) application

LOCKING MECHANISM

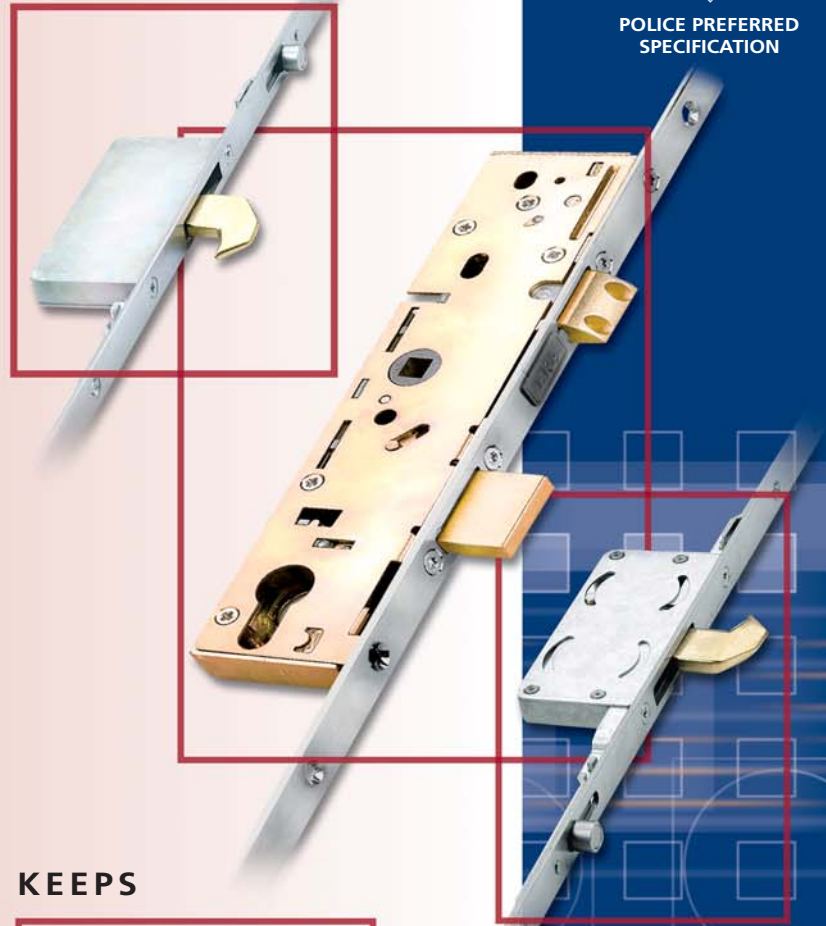

POLICE PREFERRED SPECIFICATION

KEEPS



SHOOT BOLT (OPTIONAL)



LIFETIME GUARANTEE



FORCE RESISTANT



CORROSION RESISTANT



VARIETY OF EURO PROFILE CYLINDERS



ALTERNATIVE SPINDLE LENGTHS



HARDWARE SOLUTIONS
FOR DOORS

FRENCH DOORS 2 HOOK 2 ROLLER 2 SHOOT HIGH SECURITY LOCKING SYSTEM

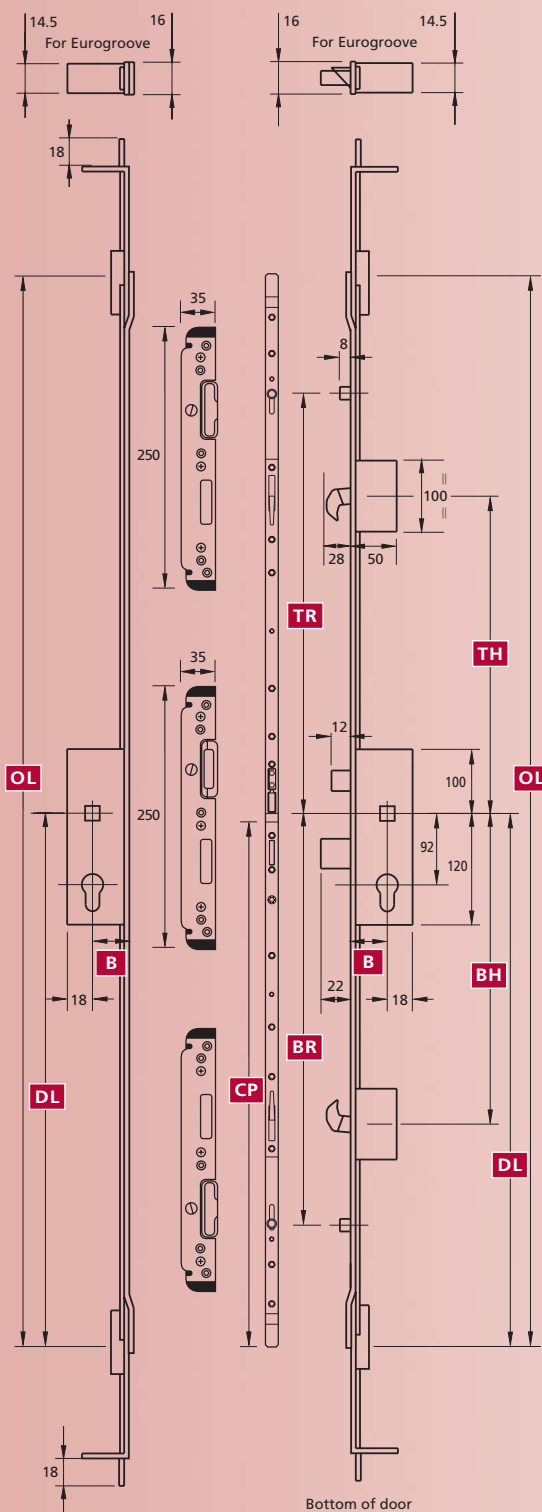


Diagram illustrates product in locked position.
Not to scale.

KEY

B	Backset	TR	Top Roller
DL	Datum Line	BH	Bottom Hook
OL	Overall Length	BR	Bottom Roller
TH	Top Hook	CP	Centre Point

MASTER

B	DL	OL	TH	TR	BH	BR	Part No.	Box Qty
35	729	1444	508	625	522	639	11-56012-OQ	5
"	"	"	"	"	"	"	11-56013-OQ	"

SLAVE

B	DL	OL	CP	Part No.	Box Qty
35	729	1444	722	11-55771-OQ	5

Centre Point is marked on Face Bar for positioning of lock and keeps

SHOOT BOLT & KEEP (SOLD SEPARATELY)

Description	Part No.	Box Qty
Shoot Bolt Extensions - 318mm	04-06010-MA	50
Shoot Bolt Extensions - 373mm	04-06011-MA	"
Shoot Bolt Extensions - 458mm	04-06012-MA	"
Shoot Keep	Profile Specific	200

To be used in conjunction with master leaf for french doors

MAINTENANCE

All moving parts should be lightly lubricated using a light non-acidic mineral oil (e.g. "3 in 1") twice per year and the surface cleaned with a soft damp cloth. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation.

TECHNICAL INFORMATION

Corrosion resistance:	BS EN 1670 Grade 3 (Minimum)
Operation:	Function test 100,000 cycles

MATERIALS

Lock case:	Steel zinc plated & yellow passivated
Face bar:	Stainless steel
Hooks and dead/sash bolt:	Forged brass
Rollers:	Stainless steel
Shoots:	Stainless steel
Keeps:	Stainless steel

